


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

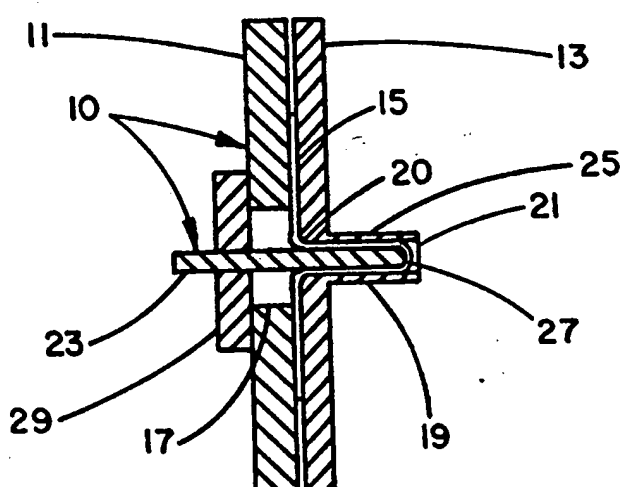

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : B29C 51/04, A61L 27/00, B29D 23/20 // B29K 27:18</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/05277 (43) International Publication Date: 23 February 1995 (23.02.95)</p>
<p>(21) International Application Number: PCT/US94/04917 (22) International Filing Date: 4 May 1994 (04.05.94) (30) Priority Data: 08/108,960 18 August 1993 (18.08.93) US (71) Applicant: W.L. GORE & ASSOCIATES, INC. [US/US]; P.O. Box 9206, 551 Paper Mill Road, Newark, DE 19714 (US). (72) Inventors: HOUSE, Wayne, D.; 7650 N. Snowbowl Road, Flagstaff, AZ 86001 (US). MOLL, Kenneth, W.; HC75, Box 2529, Camp Verde, AZ 86322 (US). ZUKOWSKI, Stanislaw, L.; 6275 Townsend Winona Road, Flagstaff, AZ 86004 (US). (74) Agents: JOHNS, David, J. et al.; W.L. Gore & Associates, Inc., P.O. Box 9206, 551 Paper Mill Road, Newark, DE 19714 (US).</p>		<p>(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>
<p>(54) Title: A THIN-WALL, SEAMLESS, POROUS POLYTETRAFLUOROETHYLENE TUBE</p> <p>(57) Abstract</p> <p>A seamless tube (25) of porous polytetrafluoroethylene having a microstructure of nodes (31) interconnected by fibrils (33, 35, 39) and having a wall thickness of less than about 0.20 mm.</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

TITLE OF THE INVENTION

A THIN-WALL, SEAMLESS, POROUS POLYTETRAFLUOROETHYLENE TUBE

FIELD OF THE INVENTION

This invention relates to the field of porous expanded
5 polytetrafluoroethylene materials of seamless, tubular form.

BACKGROUND OF THE INVENTION

Porous expanded polytetrafluoroethylene (hereinafter PTFE)
materials are made as taught originally by U.S. Patents 3,953,566 and
4,187,390 to Gore. These patents teach the manufacture of seamless,
10 tubular forms of porous expanded PTFE by a process comprising
extruding a preform of PTFE resin and a lubricant through a tubular
extruder barrel having a male form aligned with the longitudinal axis
of the tubular barrel, thereby creating a tubular extrudate, removing
the lubricant from the tubular extrudate, expanding the tubular
15 extrudate by stretching in a direction parallel to the longitudinal
axis of the tubular extrudate at a temperature less than the
crystalline melt point of PTFE, thereby forming a tube of porous
expanded PTFE having a microstructure of nodes interconnected by
fibrils. These porous expanded PTFE tubes have found application in
20 the field of implantable vascular grafts. These are presently sold as
GORE-TEX® Vascular Grafts (W. L. Gore & Associates, Inc., Flagstaff,
AZ) and are in the form of tubes of porous expanded PTFE with an
exterior reinforcement of a helical wrap of thin, porous expanded PTFE
film to provide the grafts with increased hoop strength.

25 Present commercially available seamless tubes of porous expanded
PTFE made by a process including extrusion typically have wall
thicknesses of about 0.31 mm or greater. The present limitation on
thinner walls is due to the extrusion and subsequent expansion process
which is unable to produce these thinner walls with adequate
30 concentricity and uniformity.

It is speculated that thinner-walled seamless tubes would be
useful in certain vascular graft applications wherein the tube may

-2-

serve as a replacement for segments of blood vessels. These include tubes of inside diameter less than about 2 mm. Thin-walled seamless tubes of even larger inside diameter may be useful as intraluminal vascular grafts and as coverings for intraluminal stents, both of which are used as luminal linings of body conduits.

SUMMARY OF THE INVENTION

The present invention is a seamless tube of porous PTFE having a wall thickness of less than about 0.20 mm, and a method of making the seamless tube. Porous PTFE is herein defined as PTFE containing void spaces within the bulk volume of the porous PTFE shape, and having a bulk density of less than about 2.0 g/cc. Solid, non-porous PTFE has a bulk density of about 2.2 g/cc. The presence of void spaces may be identified by visually examining surfaces of the PTFE shape which may be surfaces of cross sections of the shape. This examination may require the aid of microscopy.

By seamless tube is meant a tube without any seam that extends from the exterior surface through to the luminal surface. Tubes formed by rolling a sheet into a tubular shape incorporate such seams and are therefore not considered to be seamless. Tubes of the present invention may, however, have additional, seamed layers added to either the exterior or luminal surfaces as long as no seam extends from the exterior surface through to the luminal surface.

The method of making the seamless tube comprises selecting a precursor sheet of porous PTFE, clamping around the perimeter of the sheet to restrain the sheet and forming a portion of the sheet into a tubular shape by forcing a male form against the sheet thereby forcing a portion of the sheet into a female form, wherein the longitudinal axes of the male form and female form are substantially perpendicular to the plane of the sheet. The formed tubular shape may then be cut free from the remaining flat portion of the sheet.

The clamped sheet of porous PTFE is preferably heated prior to the forming step. Less force is required for forming with increasing application of heat.

-3-

It is also preferred that the precursor sheet of porous PTFE be of less than about 0.20 mm thickness. It is further preferred that the precursor sheet of porous PTFE has not been subjected to heat in excess of the crystalline melt temperature of PTFE.

5 Preferred precursor sheet materials are sheets of porous expanded PTFE having a microstructure of nodes interconnected by fibrils, made as taught by U.S. Patents 3,953,566 and 4,187,390. It is still further preferred that the precursor sheet of porous expanded PTFE have a symmetrical microstructure of biaxially or multiaxially-
10 oriented fibrils. These sheets having symmetrical microstructures can be expected to yield tubes of relatively uniform microstructure when formed by the method of the present invention. Sheets with symmetrical microstructures have fibrils oriented in at least two directions which are substantially perpendicular to each other and
15 wherein the fibrils in the at least two directions are of approximately the same lengths. Microstructures having a substantial majority of fibrils oriented in only two directions that are substantially perpendicular to each other are considered to have biaxially-oriented fibrils. Another preferred symmetrical
20 microstructure for the precursor sheet material has multiaxially-oriented fibrils, that is, fibrils oriented in virtually all directions within the plane of the sheet, the fibrils emanating from the nodes in all directions similar to the way spokes emanate from a wheel hub. The fibrils of these various directions should also be of
25 approximately equal lengths. Porous expanded PTFE sheet materials having symmetrical microstructures are made by biaxial expansion processes taught by U.S. Patents 3,953,566; 4,187,390 and 4,482,516.

30 Seamless tubes of the present invention may be provided with an exterior helical wrap of thin porous expanded PTFE film if a tube of increased hoop strength is desired. Additionally, seamless tubes of the present invention may be provided with rapid recovery properties as taught by U.S.P. 4,877,661 and 5,026,513. These patents are herein incorporated by reference.

-4-

BRIEF DESCRIPTION OF THE DRAWINGS

- Figure 1 describes a cross section of a clamping fixture incorporating male and female forms, useful for forming the tube of the present invention.
- 5 Figure 2 describes a cross section of the clamping fixture of Figure 2 as used during the forming process.
- Figure 3A is an enlarged schematic representation of a porous expanded PTFE precursor sheet material having a preferred symmetrical microstructure with biaxially-oriented fibrils.
- 10 Figure 3B is an enlarged schematic representation of a porous expanded PTFE precursor sheet material having a preferred symmetrical microstructure with multiaxially-oriented fibrils.
- Figure 4 shows a scanning electron photomicrograph (X 2000 magnification) of the microstructure of nodes interconnected by fibrils of a precursor sheet of porous expanded PTFE used to form
- 15 a seamless tube of the present invention.
- Figure 5 shows a scanning electron photomicrograph (X 2000 magnification) of the luminal surface of a tube of the present invention.

20

DETAILED DESCRIPTION OF THE INVENTION

- Figure 1 describes a cross section of a fixture 10 useful for forming the seamless tube of the present invention. Clamping plates 11 and 13 are clamped around the perimeter of a flat sheet 15 of porous expanded PTFE. Clamping plate 11 is provided with an access
- 25 hole 17 to allow male form 23 to be forced against the flat sheet 15. The male form 23 may optionally be provided with a stop 29 to control the length of the formed seamless tube. Clamping plate 13 is provided with a female form 19 having an open end 21 opposite the access hole 17 in plate 11. The other end of the female form 19 adjacent to the
- 30 flat sheet 20 should be provided with a radiused entrance 20. Access hole 17 should be of substantially larger diameter than the male form 23 in order to allow for enough material from flat sheet 15 to be deformed into the desired tubular shape. For example, access hole 17

-5-

may be more than three times the diameter of male form 23. Generally, the larger the access hole 17 and the larger the area of flat sheet 15 within the clamped perimeter, the more material is available to be drawn into the tubular shape, thereby allowing for the longer tubular shapes to be formed.

5 The inside diameter of the female form 19 should allow clearance for the thickness of the flat sheet 15 around the male form 23 during the forming process. Put another way, the inside diameter of the female form 19 should be equal to at least the sum of the diameter of
10 the male form 23 and twice the thickness of the flat sheet 15. If too little clearance is provided, smearing of the inner or outer surfaces of the tube microstructure may occur, thereby substantially reducing the porosity of the resulting tube. Both the male form 23 and the female form 19 may be provided with slight amounts of taper to allow
15 easier release of these components after the forming process is complete. These tapers are such that the open end 21 of female form 19 and corresponding end of male form 23 are provided with the smaller diameter of the taper. The amount of taper may be quite small, for example, a diametrical end to end difference of 0.1 mm may be useful.

20 Figure 2 describes a cross section of the forming fixture 10 after completion of the forming step. A portion of the flat sheet 15 has been formed between the male form 23 and female form 19 to create the seamless, thin-wall tube portion 25. After the forming step is complete the male form 23 is removed and the clamping plates 11 and 13
25 are separated, thereby releasing the flat sheet 15 and the seamless, thin-wall tube portion 25. The seamless, thin-wall tube portion 25 may then be cut free from the remainder of the flat sheet 15 using a sharp blade to accomplish the cutting. Tip portion 27 may be retained with the seamless, thin-wall tube portion 25 if a blind tube is
30 desired. Alternatively, if a tube with both ends open is desired, then the tip portion 27 may also be cut away.

It is preferred that the flat sheet 15 be heated during the forming step. In order to accomplish this, the forming fixture 10 should be secured into place in an oven operating at the desired
35 temperature. After adequate heating, the forming force may be applied to the flat sheet 15 from outside of the oven chamber by the use of a

-6-

male form 23 of length adequate to extend outside of the oven chamber through an opening provided in the oven wall.

Figures 3A and 3B describe enlarged schematic representations of symmetrical microstructures of porous expanded PTFE precursor sheet materials that are the preferred precursor sheet materials for making the present invention. These symmetrical microstructures have nodes interconnected by fibrils wherein the fibrils are oriented in at least two directions which are substantially perpendicular to each other. Figure 3A describes a symmetrical microstructure of nodes 31 and fibrils 33 and 35 wherein the fibrils 33 and 35 are biaxially-oriented fibrils which are oriented in two different directions that are substantially perpendicular to each other. Those microstructures may contain some fibrils 37 which are not oriented in the two different directions. Figure 3B describes another symmetrical microstructure wherein the fibrils 39 are multiaxially-oriented fibrils oriented in virtually all directions within the plane of the sheet material.

Figure 4 shows a scanning electron photomicrograph of the microstructure of nodes interconnected by fibrils of a precursor sheet of porous expanded PTFE used to form a seamless tube of the present invention. This particular sheet is 0.1 mm thick GORE-TEX® Surgical Membrane (W. L. Gore and Associates, Inc., Flagstaff, AZ). This is a sheet material that has been subjected to heat in excess of the crystalline melt temperature of PTFE. It has a microstructure of multiaxially-oriented fibrils wherein the fibrils are oriented in virtually all directions within the plane of the sheet, the fibrils emanating radially outward from each node in the fashion of spokes emanating from the hub of a wheel. Precursor sheet materials having symmetrical microstructures are preferred in order to produce a tube of relatively uniform microstructure.

Figure 5 describes a scanning electron photomicrograph (x2000 magnification) of the luminal surface of a tube of the present invention that was made from the precursor sheet material described by Figure 4. The surface shown has a microstructure of nodes interconnected by fibrils wherein the fibrils are substantially oriented in a direction parallel to the longitudinal axis of the tube and parallel to the direction of the applied forming force. The tube

-7-

had a relatively uniform wall thickness of about 0.07 mm, an inside diameter of about 8 mm, and a length of about 3 cm.

This example tube was made by clamping a sheet of 0.1 mm thick GORE-TEX® Surgical Membrane into a fixture 10 similar to that
5 described by Figures 1 and 2. This fixture had a 24 mm diameter access hole 17 and used a female form 19 of 9 mm inside diameter and 2.6 cm length. The male form 23 was of 8.0 mm diameter and 150 cm length. This assembly was secured into place within a convection air oven set at about 300 °C so that the male form 23 extended through an
10 opening in the oven wall. After 20 minutes heating time within the oven, about 2.5 kg force was applied to male form 23 at a rate of about 1 mm/sec. The fixture 10 was then removed from the oven and allowed to cool, after which it was disassembled to free the flat sheet 15 and seamless, thin-wall tube portion 25. The seamless, thin-
15 wall tube portion 25 was cut free from the flat sheet 15 using a scalpel blade. The tip portion 27 of the seamless, thin-wall tube portion 25 was also cut off. The wall thickness of the resulting tube was measured by cutting lengthwise through a portion of the tube wall and measuring the tube wall thickness adjacent to the cut using a
20 Mitutoyo snap gauge Model No. 2804-10 having a part no. 7300 frame. A sample of the tube wall was then cut away with a scalpel blade to be photographed for the scanning electron photomicrograph of Figure 5.

While this example involved the use of a precursor sheet material that had been exposed to temperatures in excess of the crystalline
25 melt temperature of PTFE, it is preferred that porous PTFE sheet materials that have not been subjected to such temperatures be used as precursor materials in that they are more easily formed into the desired shape. Tubes made from such sheet materials may be subsequently heated by physically restraining them in the direction of
30 the longitudinal axis of the tube and then heating them above the crystalline melt temperature of PTFE.

A second example was made from a porous expanded PTFE sheet material having biaxially-oriented fibrils wherein most of the fibrils were substantially oriented in a single direction. This material also
35 possessed shorter fibrils oriented in a direction substantially perpendicular to the longer fibrils of the first direction. The sheet material used was GORE-TEX® Filtration Membrane, part no. 10382 NA (W.

-8-

L. Gore & Associates, Inc., Elkton, MD). Two layers of this 0.05 mm thick membrane were stacked one above the other with a 0.013 mm thick, non-porous layer of fluorinated ethylene propylene (hereinafter FEP) between the two expanded PTFE layers. The two porous expanded PTFE layers were oriented 90° apart so that the longer fibrils of one layer were oriented in a direction substantially perpendicular to the longer fibrils of the second layer. The resulting three layer sandwich was clamped into the fixture described by Figure 1 and placed into an oven set at 315°C with the flat sheet 15 oriented horizontally and the male form 23 oriented vertically and located above the flat sheet 15. After 30 minutes, the sandwich was formed into a tube in the same fashion described for the previous example. Forming was accomplished with a force of about 0.6 kg at a rate of about 2 mm/second. The force was applied simply by placing a weight on the male form 23 and stop 29; the combined weight of the male form 23, stop 29 and weight was 0.6 kg. The resulting tube was impermeable due to the presence of the non-porous FEP layer and was of about 3 cm length with a wall thickness of about 0.05 mm.

-9-

We Claim:

1. An article comprising a seamless tube of porous polytetrafluoroethylene having a wall thickness of less than about 0.20 mm.
- 5 2. An article according to claim 1 wherein the wall thickness is less than about 0.15 mm.
3. An article according to claim 1 wherein the wall thickness is less than about 0.10 mm.
- 10 4. An article according to claim 1 wherein the wall thickness is less than about 0.06 mm.
5. An article according to claim 1 wherein the porous polytetrafluoroethylene is porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
- 15 6. An article according to claim 2 wherein the porous polytetrafluoroethylene is porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
- 20 7. An article according to claim 3 wherein the porous polytetrafluoroethylene is porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
- 25 8. An article according to claim 4 wherein the porous polytetrafluoroethylene is porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
9. An article according to claim 5 having an exterior, helical wrap of porous polytetrafluoroethylene film.
- 30 10. An article according to claim 6 having an exterior, helical wrap of porous polytetrafluoroethylene film.
11. An article according to claim 7 having an exterior, helical wrap of porous polytetrafluoroethylene film.
12. An article according to claim 8 having an exterior, helical wrap of porous polytetrafluoroethylene film.
- 35 13. An article according to claim 5, said article capable of being stretched and then rapidly recovering more than about 6 percent of its stretched length.

-10-

14. An article according to claim 6, said article capable of being stretched and then rapidly recovering more than about 6 percent of its stretched length.
- 5 15. An article according to claim 7, said article capable of being stretched and then rapidly recovering more than about 6 percent of its stretched length.
16. An article according to claim 8, said article capable of being stretched and then rapidly recovering more than about 6 percent of its stretched length.
- 10 17. An article according to claim 5 wherein the tube has a layer of fluorinated ethylene propylene.
18. An article according to claim 6 wherein the tube has a layer of fluorinated ethylene propylene.
- 15 19. An article according to claim 7 wherein the tube has a layer of fluorinated ethylene propylene.
20. An article according to claim 8 wherein the tube has a layer of fluorinated ethylene propylene.
21. An article according to claim 1 wherein the tube has two ends and wherein said tube is open only at one end.
- 20 22. An article according to claim 1 wherein the article is an implantable vascular graft.
23. An article according to claim 1 wherein the article is an intraluminal vascular graft.
24. An article according to claim 1 wherein the article is a covering
25 for an intraluminal stent.
25. An article according to claim 3 wherein the article is an implantable vascular graft.
26. An article according to claim 3 wherein the article is an intraluminal vascular graft.
- 30 27. An article according to claim 3 wherein the article is a covering for an intraluminal stent.
28. An article according to claim 5 wherein the article is an implantable vascular graft.
29. An article according to claim 5 wherein the article is an
35 intraluminal vascular graft.
30. An article according to claim 5 wherein the article is a covering for an intraluminal stent.

-11-

31. An article according to claim 9 wherein the article is an implantable vascular graft.
32. An article according to claim 9 wherein the article is an intraluminal vascular graft.
- 5 33. An article according to claim 9 wherein the article is a covering for an intraluminal stent.
34. A method of making a seamless tube of porous polytetrafluoroethylene comprising selecting a sheet of porous polytetrafluoroethylene having a perimeter, clamping around the
10 perimeter of the sheet to restrain the sheet, and forming a portion of the sheet into a tubular shape by forcing a male form against the sheet thereby forcing a portion of the sheet into a female form, wherein longitudinal axes of the male form and female forms are substantially perpendicular to the sheet.
- 15 35. A method according to claim 34 wherein the sheet of porous expanded polytetrafluoroethylene is heated to at least about 290° C prior to forming a portion of the sheet into a tubular shape.
- 20 36. A method according to claim 34 wherein said sheet of porous polytetrafluoroethylene is a sheet of porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
37. A method according to claim 34 wherein said tube has a wall thickness of less than about 0.20 mm.
- 25 38. A method according to claim 34 wherein said tube has a wall thickness of less than about 0.15 mm.
39. A method according to claim 34 wherein said tube has a wall thickness of less than about 0.10 mm.
- 30 40. A method according to claim 34 wherein said tube has a wall thickness of less than about 0.06 mm.

1/3

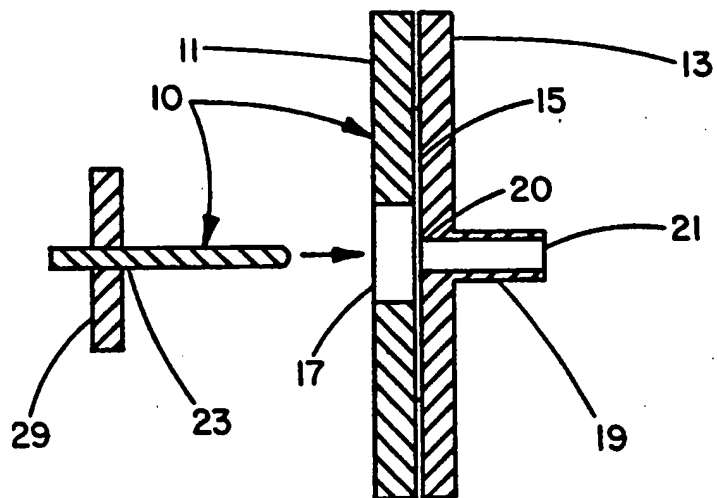


FIG. 1

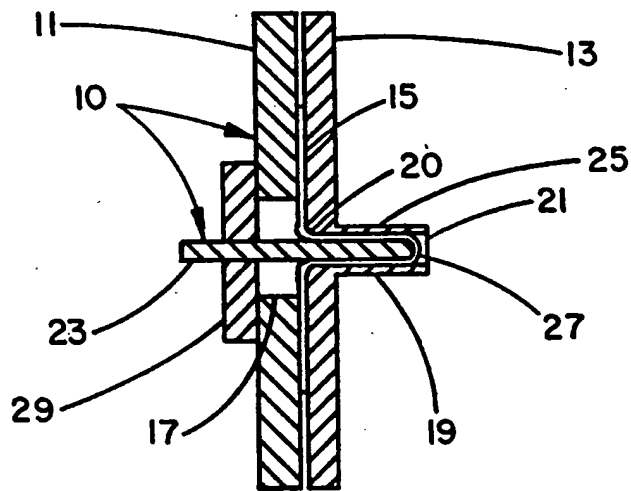


FIG. 2

2/3

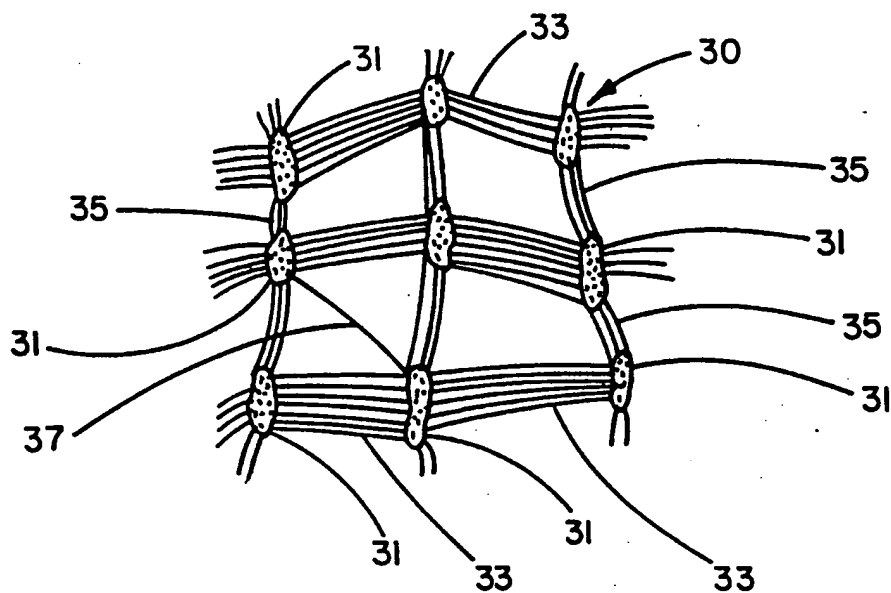


FIG. 3A

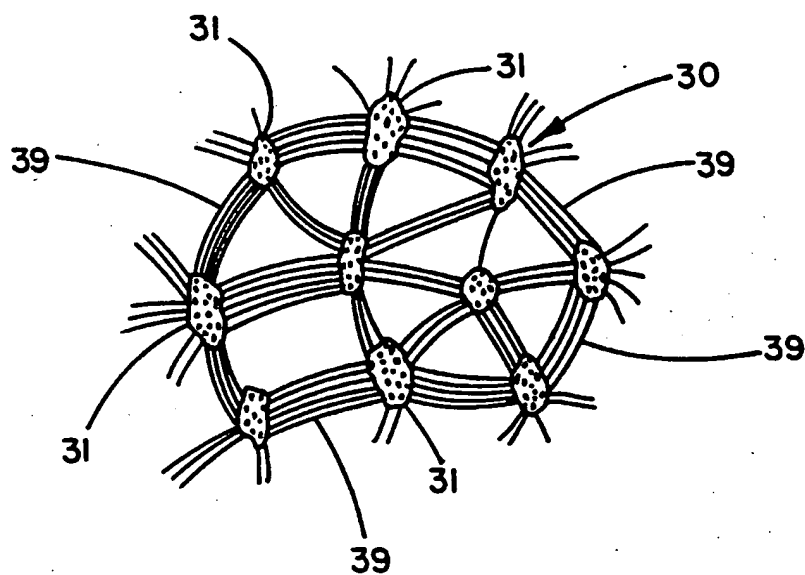


FIG. 3B

3/3

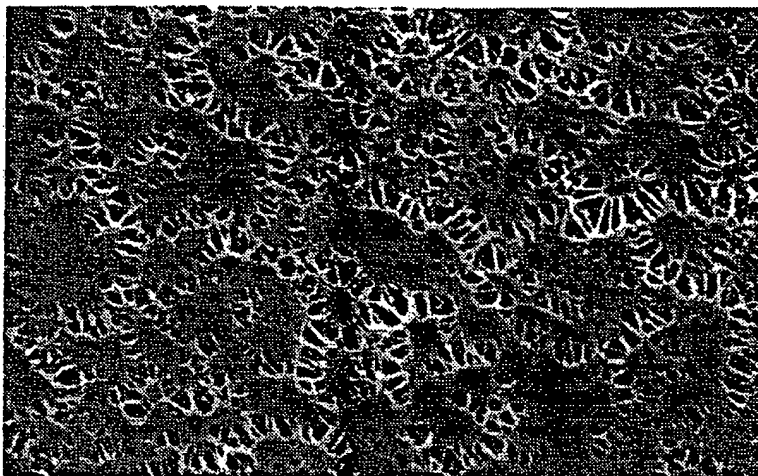


FIG. 4

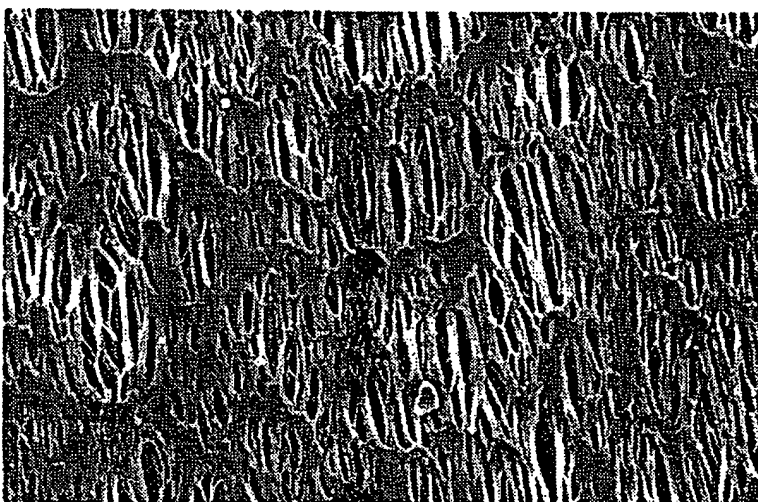


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 94/04917

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B29C51/04 A61L27/00 B29D23/20 //B29K27:18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B29C A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 177 334 (KOICHI) 4 December 1979 see tables 1,2,3 ----	1,2,5,6, 9,10,13, 14,17, 18, 21-24, 28-33
A	US,A,4 059 380 (JUDZIS ET AL.) 22 November 1977 see claim 1; figures 3,5 ----	34-40
A	GB,A,2 033 234 (SUMITOMO ELECTRIC INDUSTRIES) 21 May 1980 see page 2, line 6 - line 9 see page 2, line 26 - line 30 ----- -/--	17,18



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

12 September 1994

Date of mailing of the international search report

05-10-1994

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Attalla, G

INTERNATIONAL SEARCH REPORT

Inter national Application No
PCT/US 94/04917

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP,A,0 313 263 (GORE & ASSOCIATES) 26 April 1989 cited in the application see claim 1 -----</p>	13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 94/04917

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4177334	04-12-79	JP-C- 1394390	11-08-87
		JP-A- 53034868	31-03-78
		JP-B- 61054578	22-11-86
		CA-A- 1099463	21-04-81
		DE-A,B,C 2740759	30-03-78
		FR-A,B 2364107	07-04-78
		GB-A- 1590275	28-05-81
		US-A- 4250138	10-02-81
US-A-4059380	22-11-77	BE-A- 858177	16-12-77
		CA-A- 1099883	28-04-81
		DE-A,C 2737848	09-03-78
		FR-A- 2362713	24-03-78
		GB-A- 1560215	30-01-80
		NL-A- 7709294	28-02-78
		SE-B- 419065	13-07-81
		SE-A- 7709436	27-02-78
GB-A-2033234	21-05-80	JP-C- 1313018	28-04-86
		JP-A- 55052754	17-04-80
		JP-B- 60037733	28-08-85
		AU-B- 525750	25-11-82
		AU-A- 5169479	17-04-80
		BE-A- 879354	01-02-80
		CA-A- 1140704	08-02-83
		DE-A- 2941280	17-04-80
		FR-A,B 2438471	09-05-80
		NL-A- 7907530	15-04-80
		SE-B- 443289	24-02-86
		SE-A- 7908448	13-04-80
		US-A- 4304010	08-12-81
EP-A-0313263	26-04-89	US-A- 4877661	31-10-89
		US-A- 5308664	03-05-94
		AU-A- 2292288	20-04-89
		DE-A- 3879613	29-04-93
		DE-T- 3879613	07-10-93
		GB-A- 2211190	28-06-89
		JP-A- 2000645	05-01-90
		US-A- 5026513	25-06-91